



PO Box 1847
Post Falls, ID 83877-1847
T 208-773-3885
F 208-773-3799
E <summiteq@yahoo.com>

- Vertical balers
 - 36"W
 - 48"W
 - 60"W
 - 72"W
 - specialized
- Horizontal closed-door balers
 - 'B' series
 - 'C' series
 - 'D' series
 - 'E' series
 - 'F' series
 - specialized
- Horizontal open-end balers**
 - Standard-duty series
 - Heavy-duty 'B' series
 - Heavy-duty 'C' series
 - Heavy-duty 'D' series
 - Heavy-duty 'E' series
 - specialized
- Twin-ram balers
 - Standard-duty series
 - Heavy-duty series
- Scrap metal balers
- Oil filter balers
- Conveyors
 - Slider-bed
 - Chain-belt
- Fluffers
- Cart dumpers
- Self-contained compactors
- Stationary compactors

Design assistance with waste and recycling flow, site fit, etc.

*Engineered for Peak
Performance*

Open-End Auto-Tie Balers



Designed for peak performance, **OPEN-ENDED AUTO-TYING BALERS** built by Summit Equipment process large volumes of material with minimal labor. In fact, these balers can be set up with air or mechanical conveyors for unattended baling. Choose from 18 standard models created from over 25 years experience designing and building baling equipment. Ask about models for baling corrugated, news, high-grades, mixed-waste, and other papers, as well as aluminum, tin, or plastics. Whichever model you choose, you will find productivity, durability, and flexibility built right in, with options available to suit the baler to your need and site situation.

PRODUCTIVITY

- ☑ Adaptable for automated feeding
- ☑ Variety of cylinder sizes for controlling bale density
- ☑ User-variable bale length to maximize shipping loads
- ☑ Automatic tying at user-adjustable bale lengths using 100 lb coil “box wire”
- ☑ Improved paper dog design for superior material retention
- ☑ Simplified hydraulic plumbing for reliability and quieter operation
- ☑ No screens to remove for easy clean up behind the platen
- ☑ Double the bale output with half the man-hours of closed ended balers

DURABILITY

- ☑ Flange-mount cylinder w/ floating clevis block prevents leaks and extends cylinder life up to 300%
- ☑ Extra-strength 1” thick honeycombed steel plate reinforces platen
- ☑ Replaceable T-1 steel wear liners, standard
- ☑ Full-width, full-depth under-floor girders maintain a level baling surface under tough conditions
- ☑ Expert craftsmanship on all welds assures structural integrity, true alignment and longer life
- ☑ O-Ring hydraulic fittings prevent leaks, standard
- ☑ Industry-standard hydraulic components

FLEXIBILITY


- ☑ 18 standard models, plus options to make the baler fit your needs
- ☑ Power unit mounted atop or alongside baler, as site requires
- ☑ Adaptable for feeding manually or with air or mechanical conveyor
- ☑ Choice of straight, flared, or custom feed hoppers
- ☑ 208/230/460/575 Volt, 3-phase options
- ☑ Programmable logic controller for consistent operation, adjustability
- ☑ Adjustable baling and compression settings for baling a variety of materials

SPECIFICATIONS

MODEL	B7-AT	B8-AT	C7-AT	C8-AT	C10-AT	D7-AT	D8-AT	E8-AT	E10-AT
LOAD OPENING	30"W x 30"L		30"W x 46"L			42"W x 46"L (1)			
BALE CROSS-SECTION	30"W x 30"L		30"W x 42"L			42"W x 30"H		42"W x 42"H	
BALE LENGTH	USER ADJUSTABLE								
CYLINDER BORE	7"	8"	7"	8"	10"	7"	8"	8"	10"
PLATEN PRESSURE PSI (2)	85	112	61	80	143	61	80	57	89
POWER UNIT	15hp	25hp	15hp	25hp	50hp	15hp	25hp	25hp	50hp
BALE DENSITY (3)	25-30	29-33	22-26	25-30	26-32	22-26	25-30	22-28	26-31

(1) Optional extended-length feed opening of 60" is available; Add "X" to end of model # (ie E10-ATX)
 (2) At normal system pressure
 (3) For corrugated, typical: Actual bale density will depend on the material, feeding method, humidity, etc.

DIMENSIONS

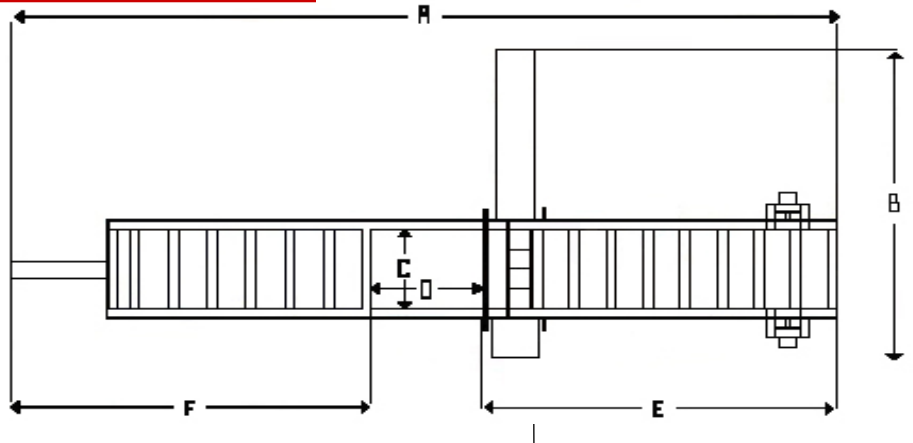

MODEL	B7-AT	B8-AT	C7-AT	C8-AT	C10-AT	D7-AT	D8-AT	E8-AT	E10-AT
A OVERALL LENGTH	322"	322"	354"	354"	354"	354"	354"	354"	354"
B OVERALL WIDTH**	149"	149"	149"	149"	149"	161"	161"	161"	161"
C FEED WIDTH	30"	30"	30"	30"	30"	42"	42"	42"	42"
D FEED LENGTH	30"	30"	46"	46"	46"	46"*	46"*	46"*	46"*
E EJECT END TO FEED	145"	145"	145"	145"	145"	145"	145"	145"	145"
F BACK END TO FEED	147"	147"	163"	163"	163"	163"	163"	163"	163"

* Optional extended-length feed opening of 60" is available
 ** Including automatic tying mechanisms

OPTIONS

- ☑ Auto-actuating electric-eye
- ☑ Oil-to-air cooling system
- ☑ Low-oil shutdown protection
- ☑ Custom feed hoppers
- ☑ Feed conveyors
- ☑ Conveyor interface
- ☑ Shear blades or ripper teeth
- ☑ Bale ejection rollers or tables
- ☑ Paper fluffers, stationary or swing-away
- ☑ Bale ejection rollers
- ☑ Reduce cycle time
- ☑ Slatted floor and platen bottom



Summit Equipment, Inc.
 PO Box 1847
 Post Falls, ID 83877-1847
 T 208-773-3885
 F 208-773-3799
 E ContactUs@SummitEq.com