

PO Box 1847
Post Falls, ID 83877-1847
T 208-773-3885
F 208-773-3799
E <ContactUs@SummitEq.com>

- Vertical balers
 - 36"W
 - 48"W
 - 60"W
 - 72"W
 - specialized
- Horizontal closed-door balers
 - 'B' series
 - 'C' series
 - 'D' series
 - 'E' series
 - 'F' series
 - specialized
- Horizontal open-end balers
 - Standard-duty series
 - Heavy-duty 'B' series
 - Heavy-duty 'C' series
 - Heavy-duty 'D' series
 - Heavy-duty 'E' series
 - specialized
- Twin-ram balers
 - Standard-duty series
 - Heavy-duty series
- Scrap metal balers
- Oil filter balers
- Conveyors
 - Slider-bed
 - Chain-belt
- Fluffers
- Cart dumpers
- Self-contained compactors
- Stationary compactors**

Design assistance with waste and recycling flow, site fit, etc.

Stationary Compactors



Why dispose of waste in “dumpsters” that always seem to look messy and need emptying so often? A compaction system captures waste so it can’t be blown around by the wind, and compresses it to a fraction of its original volume. The result is a cleaner garbage site and drastically reduced emptyings, savings thousands of dollars.

Stationary compactors are ideal for many commercial, institutional, and industrial garbage sites with dry to moderately-moist waste. Savings vary; ask for a fast, no-obligation waste-stream analysis, showing you dollar-for-dollar comparison between your current garbage process and what a Summit compaction system would do.

Summit compactors are designed and build by experts with over 30 years of waste equipment experience. They offer features and performance only available as extra-cost options with other brands. Compare: You’ll see the difference in the Summit.

*Engineered for Peak
Performance*

PERFORMANCE

- ✓ 15-48 tons of packing force cuts waste volume 75-85%, saving space and cash
- ✓ Superior reciprocating ram design maximizes ram face PSI
- ✓ Tough industry-standard “slider” design: No costly guide replacement
- ✓ “On-call” hydraulic system operates at minimum pressure until needed for heavy packing
- ✓ Automatic “container max” system maintains pressure to ensure full container

ECONOMY

- ✓ Industry-standard components assure long life and simple maintenance
- ✓ Available “Auto-Start” reduces labor, ensures compaction
- ✓ Lower HP per ram face PSI means reduced power usage
- ✓ Control employee theft, increase building security, eliminate scavenging and unauthorized waste.
- ✓ Available “Dump-a-Train” system can reduce capital outlay, maintenance, and liability.


FLEXIBILITY

- ✓ Choice of over 10 packing heads, including heavy-duty models, openings 22”x30” to 84”x60”
- ✓ Choice of containers, front or rear load from 3-6 cubic yards, roll-off from 10-40 yards
- ✓ Single and multiple cycles standard, user-adjustable
- ✓ Available hoppers provide security, continuous feeding, expanded load capacity

OPTIONS

- ✓ Cart and dumper systems
- ✓ Gauges, lights to measure packing
- ✓ Safety protected “Auto-Start”
- ✓ Custom paint colors
- ✓ Dewatering & special-purpose
- ✓ Keypad security access
- ✓ Start-up alarm

DIMENSIONS

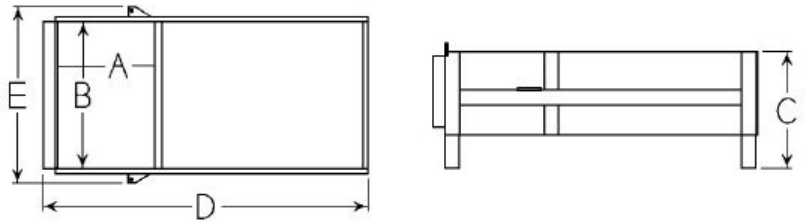

MODEL	Mfgs Rating	LENGTH	WIDTH	DEPTH	LENGTH	WIDTH	HEIGHT
		A	B		D	E	C
S-2230	.3 cu.yd.	22"	30"	17"	44"	40"	42"
S-2244	.3 cu.yd.	22"	44"	15"	43"	56"	37"
S-3240	1.0 cu.yd.	32"	40"	18"	78"	52"	48"
S-4060	2.0 cu.yd.	40"	60"	24"	103"	72"	48"
S-4860	2.0 cu.yd.	48"	60"	24"	134"	72"	48"
S-6060	3.0 cu.yd.	60"	60"	30"	177"	80"	52"
S-7260	3.5 cu.yd.	72"	60"	30"	201"	80"	52"
S-8460	4.0 cu.yd.	84"	60"	30"	225"	80"	52"

SPECIFICATIONS

MODEL*	LOAD CHAMBER	CU YD /HOUR	RAM PSI		MOTOR	HYDRAULIC	CYLINDER
	TOP OPENING		NORM	MAX		PUMP	
S-2230	22"L x 30"W	48	26.7	32.0	2 HP	5.5 dual	(2) 3"
S-2244	22"L x 44"W	46	30.2	47.2	2 HP	6.5 dual	(2) 3"
S-3240	32"L x 40"W	46	30.6	38.3	2 HP	6.5 dual	(2) 3"
S-4060	40"L x 60"W	97	30.2	37.8	10 HP	12.0 dual	(2) 4"
S-4060 HD	40"L x 60"W	171	47.3	59.1	10 HP	27.0 dual	(2) 5"
S-4860	48"L x 60"W	116	30.2	37.8	10 HP	12.0 dual	(2) 4"
S-4860 HD	48"L x 60"W	165	47.3	59.1	10H	27.0 dual	(2) 5"
S-6060	60"L x 60"W	138	31.4	39.3	15 HP	16.0 single	(1) 6"
S-6060 HD	60"L x 60"W	160	42.8	53.4	15 HP	27.0 dual	(1) 7"
S-7260	72"L x 60"W	142	31.4	39.3	15 HP	16.0 single	(1) 6"
S-7260 HD	72"L x 60"W	163	42.8	53.4	15 HP	27.0 dual	(1) 7"
S-8460	84"L x 60"W	148	31.4	39.3	15 HP	16.0 single	(1) 6"
S-8460 HD	84"L x 60"W	173	42.8	53.4	15 HP	27.0 dual	(1) 7"

* Other models and performances available, including custom, dewatering, etc.



Summit Equipment, Inc.
 PO Box 1847
 Post Falls, ID 83877-1847
 T 208-773-3885
 F 208-773-3799
 E <ContactUs@SummitEq.com>