



PO Box 1847
Post Falls, ID 83877-1847
T 208-773-3885
F 208-773-3799
E Darren@SummitEq.com
W www.SummitEq.com

Vertical balers

36"W

48"W

60"W

72"W

specialized

Horizontal closed-door balers

'B' series

'C' series

'D' series

'E' series

'F' series

specialized

Horizontal open-end balers

Standard-duty series

Heavy-duty 'B' series

Heavy-duty 'C' series

Heavy-duty 'D' series

Heavy-duty 'E' series

specialized

Twin-ram balers

Standard-duty series

Heavy-duty series

Scrap metal balers

Oil filter balers

Conveyors

Slider-bed

Chain-belt

Fluffers

Cart dumpers

Self-contained compactors

Stationary compactors

Design assistance with waste
and recycling flow, site fit, etc.

*Engineered for Peak
Performance*

Stationary Compactors



Why dispose of waste in “dumpsters” that always seem to look messy and need emptying so often? A compaction system captures waste so it can't be blown around by the wind, and compresses it to a fraction of its original volume. The result is a cleaner garbage site and drastically reduced emptyings, savings thousands of dollars.

Stationary compactors are ideal for many commercial, institutional, and industrial garbage sites with dry to moderately-moist waste. Savings vary; ask for a fast, no-obligation waste-stream analysis, showing you dollar-for-dollar comparison between your current garbage process and what a Summit compaction system would do.

Summit compactors are designed and build by experts with over 30 years of waste equipment experience. They offer features and performance only available as extra-cost options with other brands. Compare: You'll see the difference in the Summit.

PERFORMANCE

- ✓ 15-48 tons of packing force cuts waste volume 75-85%, saving space and cash
- ✓ Superior reciprocating ram design maximizes ram face PSI
- ✓ Tough industry-standard “slider” design: No costly guide replacement
- ✓ “On-call” hydraulic system operates at minimum pressure until needed for heavy packing
- ✓ Automatic “container max” system maintains pressure to ensure full container

ECONOMY

- ✓ Industry-standard components assure long life and simple maintenance
- ✓ Available “Auto-Start” reduces labor, ensures compaction
- ✓ Lower HP per ram face PSI means reduced power usage
- ✓ Control employee theft, increase building security, eliminate scavenging and unauthorized waste.
- ✓ Available “Dump-a-Train” system can reduce capital outlay, maintenance, and liability.


FLEXIBILITY

- ✓ Choice of over 10 packing heads, including heavy-duty models, openings 22”x30” to 84”x60”
- ✓ Choice of containers, front or rear load from 3-6 cubic yards, roll-off from 10-40 yards
- ✓ Single and multiple cycles standard, user-adjustable
- ✓ Available hoppers provide security, continuous feeding, expanded load capacity

OPTIONS

- ✓ Cart and dumper systems
- ✓ Gauges, lights to measure packing
- ✓ Safety protected “Auto-Start”
- ✓ Custom paint colors
- ✓ Dewatering & special-purpose
- ✓ Keypad security access
- ✓ Start-up alarm

DIMENSIONS

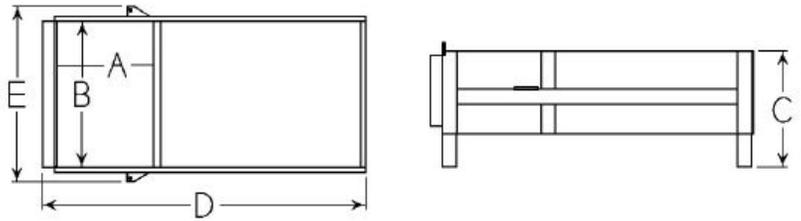

| MODEL | Mfgs Rating | LENGTH | WIDTH | DEPTH | LENGTH | WIDTH | HEIGHT |
|--------|-------------|--------|-------|-------|--------|-------|--------|
| | | A | B | | D | E | C |
| S-2230 | .3 cu.yd. | 22" | 30" | 17" | 44" | 40" | 42" |
| S-2244 | .3 cu.yd. | 22" | 44" | 15" | 43" | 56" | 37" |
| S-3240 | 1.0 cu.yd. | 32" | 40" | 18" | 78" | 52" | 48" |
| S-4060 | 2.0 cu.yd. | 40" | 60" | 24" | 103" | 72" | 48" |
| S-4860 | 2.0 cu.yd. | 48" | 60" | 24" | 134" | 72" | 48" |
| S-6060 | 3.0 cu.yd. | 60" | 60" | 30" | 177" | 80" | 52" |
| S-7260 | 3.5 cu.yd. | 72" | 60" | 30" | 201" | 80" | 52" |
| S-8460 | 4.0 cu.yd. | 84" | 60" | 30" | 225" | 80" | 52" |

SPECIFICATIONS

| MODEL* | LOAD CHAMBER | CU YD /HOUR | RAM PSI | | MOTOR | HYDRAULIC | CYLINDER |
|-----------|--------------|-------------|---------|------|-------|-------------|----------|
| | TOP OPENING | | NORM | MAX | | PUMP | |
| S-2230 | 22"L x 30"W | 48 | 26.7 | 32.0 | 2 HP | 5.5 dual | (2) 3" |
| S-2244 | 22"L x 44"W | 46 | 30.2 | 47.2 | 2 HP | 6.5 dual | (2) 3" |
| S-3240 | 32"L x 40"W | 46 | 30.6 | 38.3 | 2 HP | 6.5 dual | (2) 3" |
| S-4060 | 40"L x 60"W | 97 | 30.2 | 37.8 | 10 HP | 12.0 dual | (2) 4" |
| S-4060 HD | 40"L x 60"W | 171 | 47.3 | 59.1 | 10 HP | 27.0 dual | (2) 5" |
| S-4860 | 48"L x 60"W | 116 | 30.2 | 37.8 | 10 HP | 12.0 dual | (2) 4" |
| S-4860 HD | 48"L x 60"W | 165 | 47.3 | 59.1 | 10H | 27.0 dual | (2) 5" |
| S-6060 | 60"L x 60"W | 138 | 31.4 | 39.3 | 15 HP | 16.0 single | (1) 6" |
| S-6060 HD | 60"L x 60"W | 160 | 42.8 | 53.4 | 15 HP | 27.0 dual | (1) 7" |
| S-7260 | 72"L x 60"W | 142 | 31.4 | 39.3 | 15 HP | 16.0 single | (1) 6" |
| S-7260 HD | 72"L x 60"W | 163 | 42.8 | 53.4 | 15 HP | 27.0 dual | (1) 7" |
| S-8460 | 84"L x 60"W | 148 | 31.4 | 39.3 | 15 HP | 16.0 single | (1) 6" |
| S-8460 HD | 84"L x 60"W | 173 | 42.8 | 53.4 | 15 HP | 27.0 dual | (1) 7" |

* Other models and performances available, including custom, dewatering, etc.



PO Box 1847
 Post Falls, ID 83877-1847
 T 208-773-3885
 F 208-773-3799
 E Darren@SummitEq.com